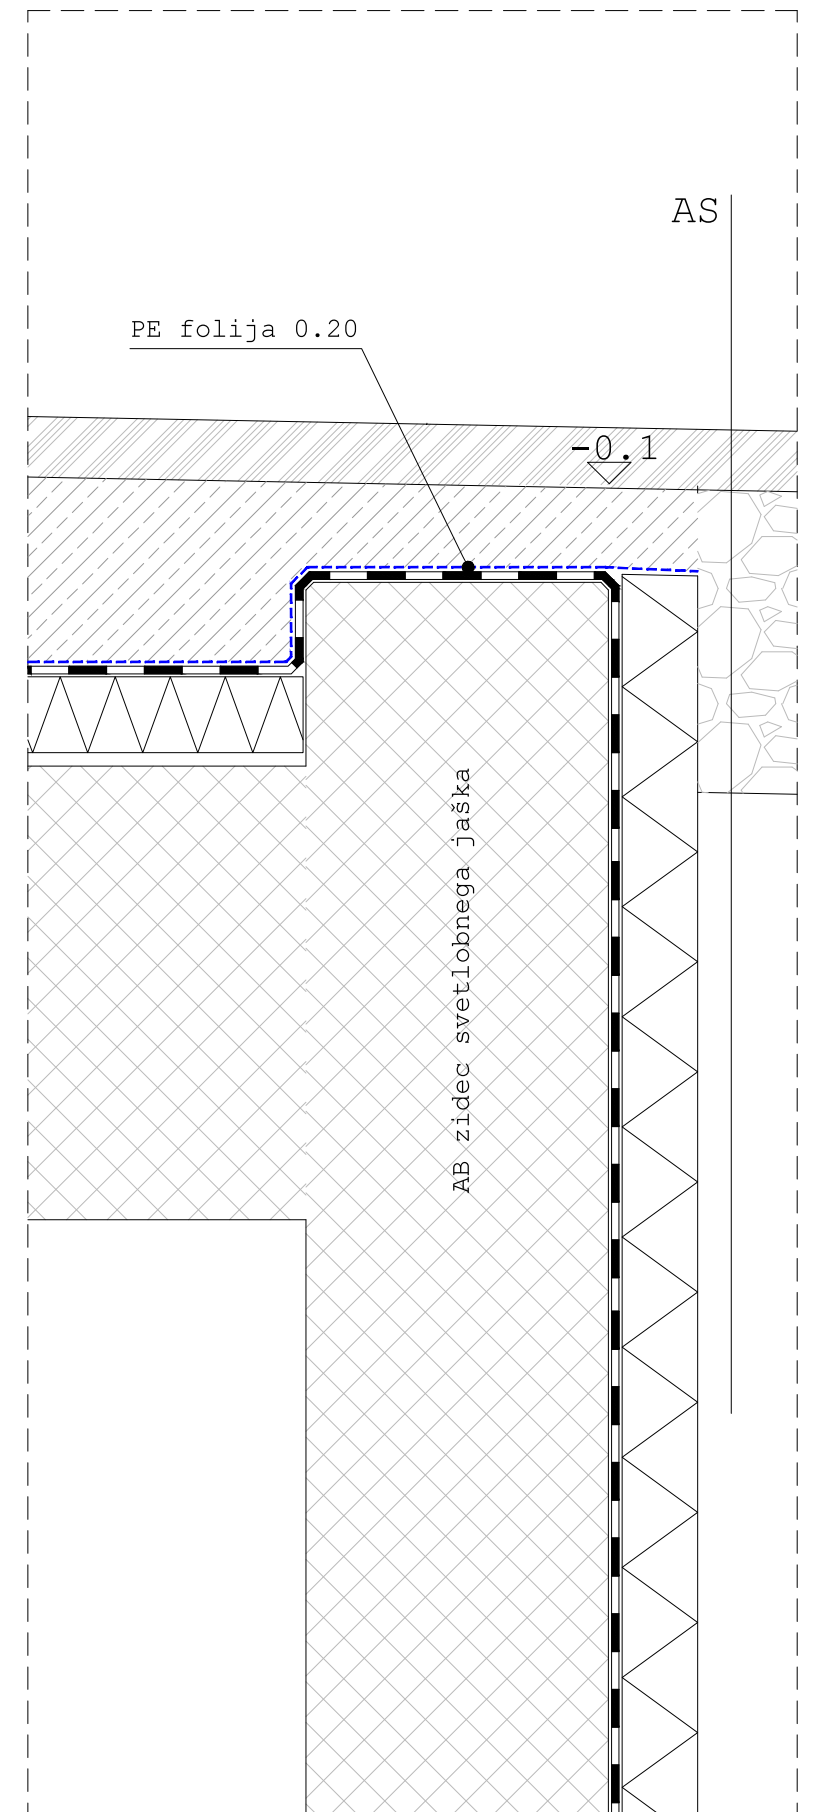
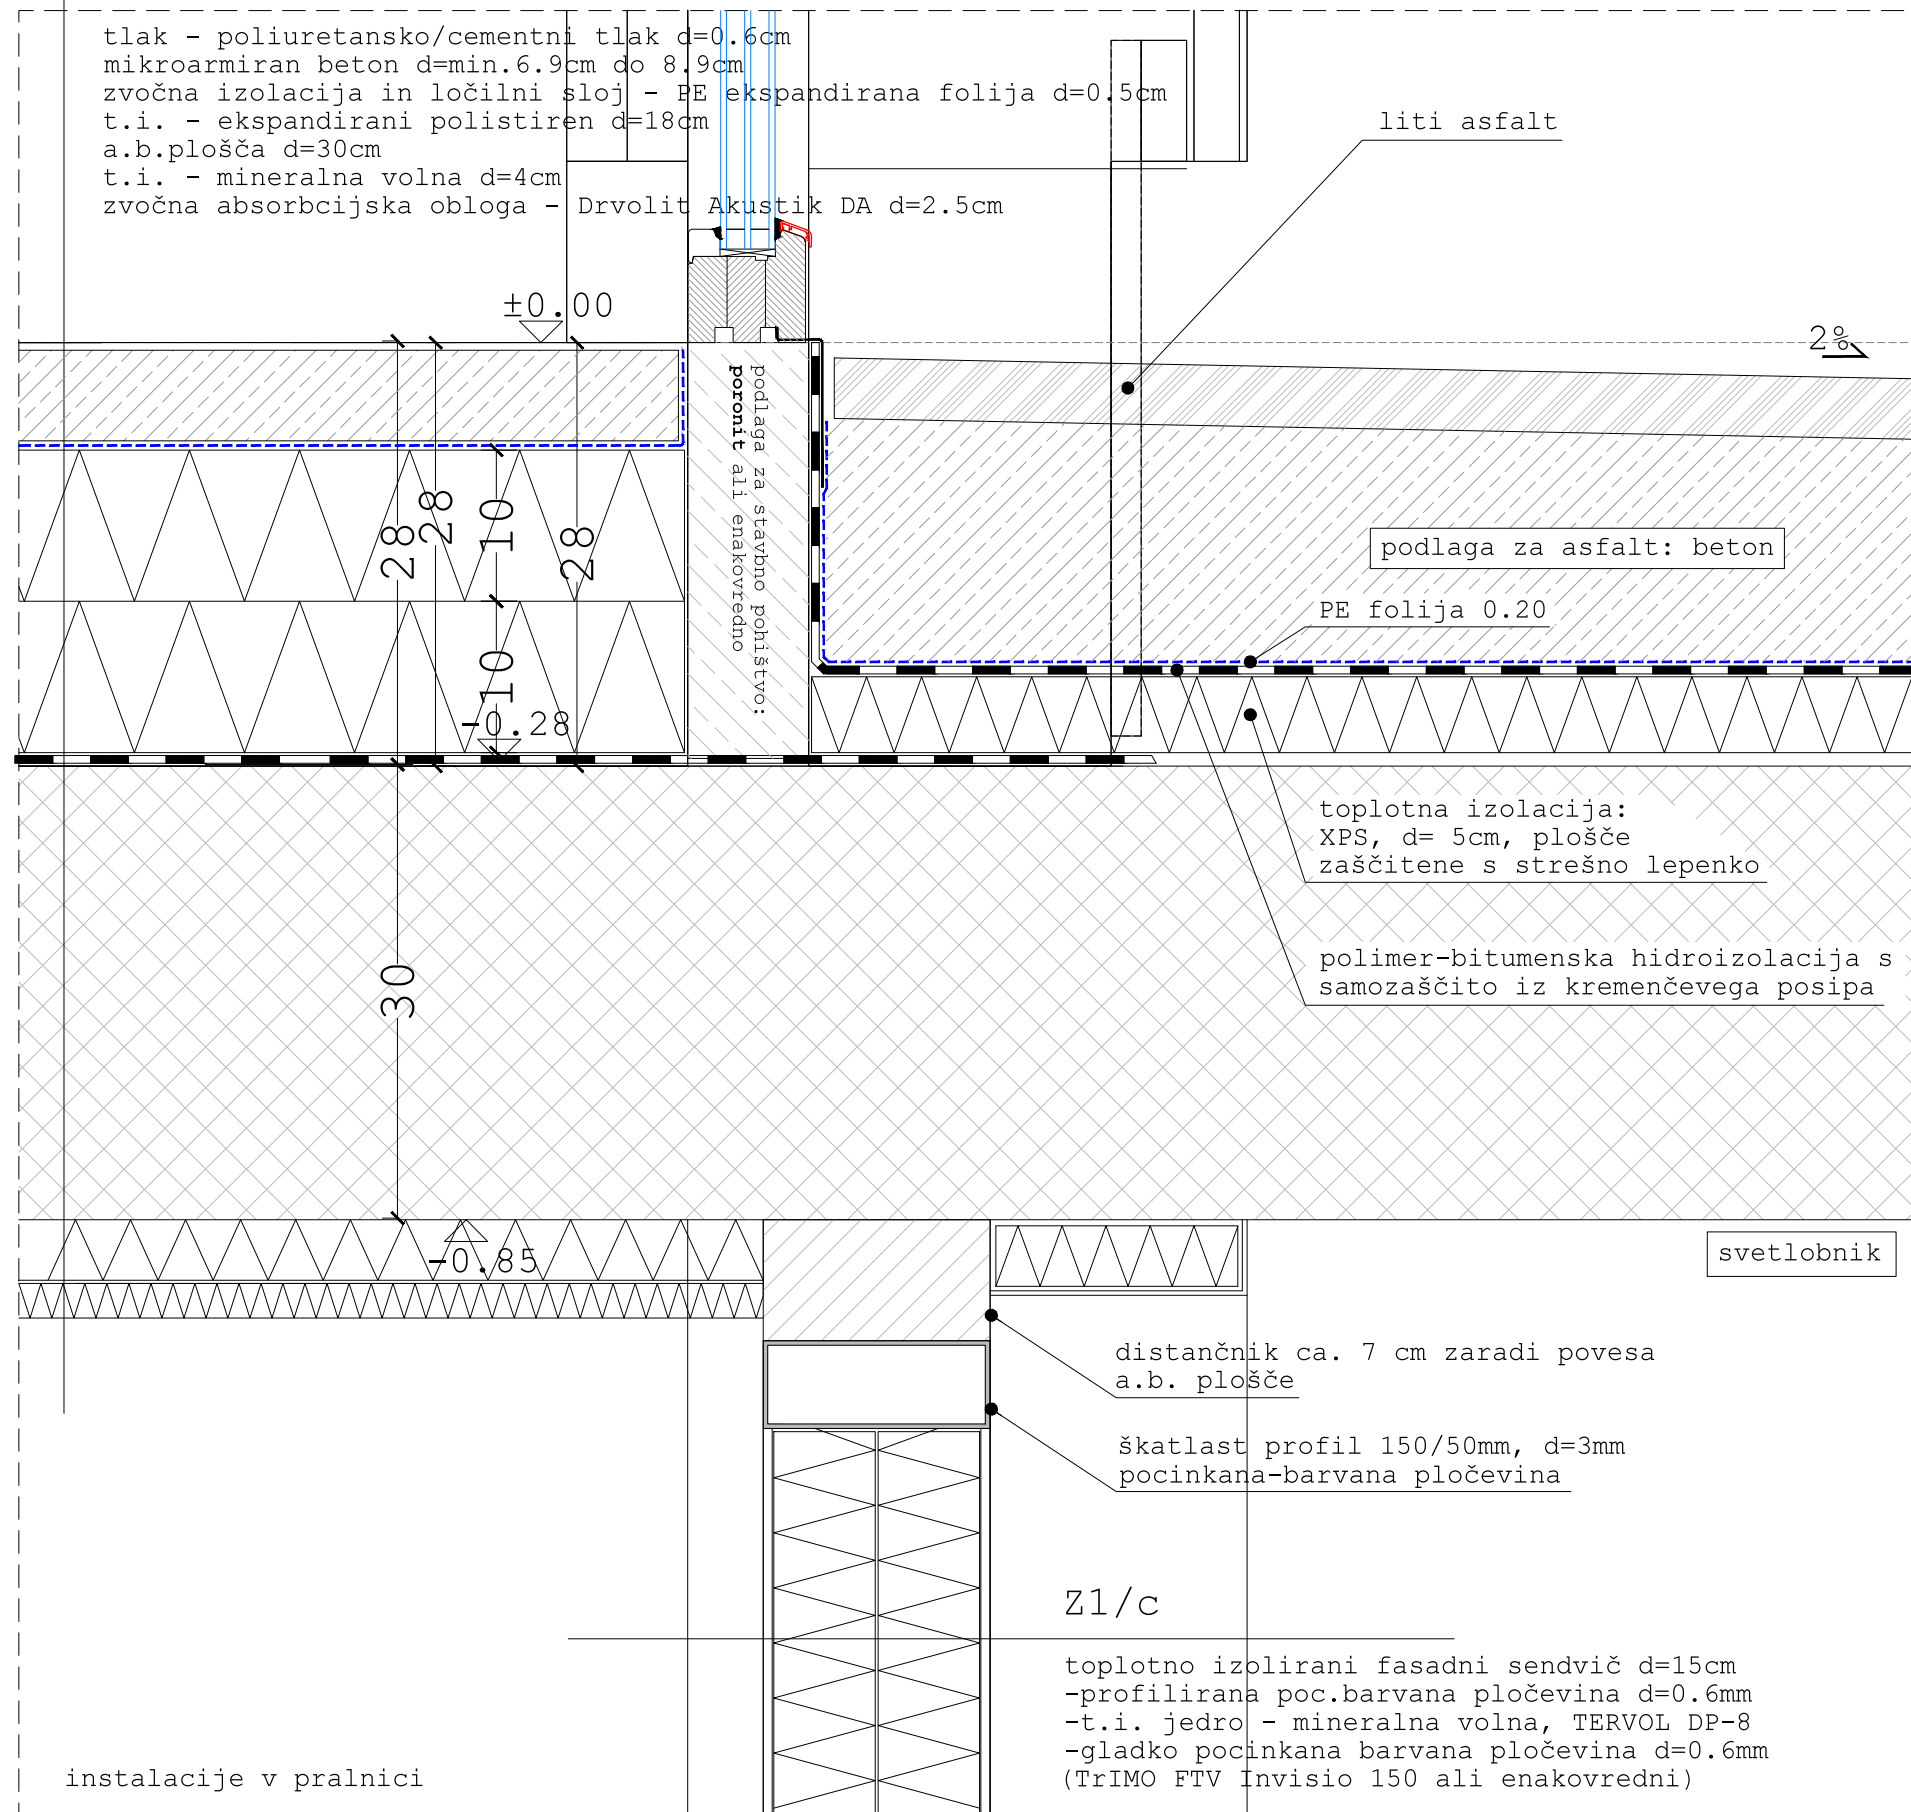


kuhinja
P5

tlak - poliuretansko/cementni tlak d=0.6cm		
mikroarmiran beton d=min.6.9cm do 8.9cm		
zvočna izolacija in ločilni sloj - PE ekspanzirana folija d=0.5cm		
t.i. - ekspanzirani polistiren d=18cm		
a.b.plošča d=30cm		
t.i. - mineralna volna d=4cm		
zvočna absorpcijska obloga - Drvolit Akustik DA d=2.5cm		


$$\overleftrightarrow{15}$$