

Project: . .

/ .

**TEMELJNA PLOŠČA - IZVLEČEK ARMATURE****Project data**

Title : .

Component : .

Plan No. : .

**B A R S C H E D U L E Steelgrade: S500B**

Pos.	No.	d	Length	D8	D10	D12	D14	D16
1	327	14	5.63				1841.01	
2	327	14	5.65				1847.55	
3	414	14	12.00				4968.00	
4	163	14	6.00				978.00	
5	120	14	9.00				1080.00	
6	114	14	2.88				328.32	
7	1390	14	1.53				2126.70	
8	29	14	5.44				157.76	
9	31	14	5.50				170.50	
10	269	14	6.73				1810.37	
11	63	14	5.65				355.95	
12	46	14	6.09				280.14	
13	269	14	6.75				1815.75	
14	24	14	5.68				136.32	
15	51	14	6.18				315.18	
16	1	14	4.50				4.50	
17	28	16	2.20					61.60
18	18	14	4.91				88.38	
19	69	12	1.95			134.55		
20	144	10	1.75		252.00			
21	8	16	3.03					24.24
22	2	14	3.18				6.36	
23	36	14	2.39				86.04	
24	6	14	3.78				22.68	
25	10	12	3.98			39.80		
26	34	12	3.46			117.64		
27	8	16	2.53					20.24
28	8	16	2.16					17.28
29	10	16	2.15					21.50
30	6	16	2.16					12.96
31	9	14	3.89				35.01	
32	12	14	3.90				46.80	
33	12	14	3.89				46.68	
34	8	14	2.88				23.04	
35	4	14	9.92				39.68	
36	4	16	9.80					39.20
37	2	16	3.59					7.18
38	2	16	5.25					10.50
39	8	16	6.00					48.00
40	39	14	5.68				221.52	
42	8	14	7.90				63.20	
43	8	14	7.84				62.72	
44	21	14	2.51				52.71	
45	21	14	4.19				87.99	
46	21	14	4.22				88.62	
47	1	14	4.17				4.17	
48	16	12	2.63			42.08		
49	16	14	2.28				36.48	
50	8	14	1.54				12.32	
51	8	14	2.74				21.92	
52	12	14	1.68				20.16	

Project: . . .

/ .

**B A R S C H E D U L E Steelgrade: S500B**

Pos.	No.	d	Length	D8	D10	D12	D14	D16
53	4	14	1.28				5.12	
54	34	10	3.16		107.44			
55	29	10	2.10		60.90			
56	32	12	2.23			71.36		
57	152	10	1.97		299.44			
58	28	10	3.50		98.00			
59	8	10	2.77		22.16			
60	64	10	1.90		121.60			
61	46	10	3.09		142.14			
62	4	14	2.53				10.12	
63	4	14	2.13				8.52	
64	16	14	1.93				30.88	
65	16	14	2.80				44.80	
66	88	10	1.92		168.96			
67	29	12	2.31			66.99		
68	29	10	1.14		33.06			
69	63	12	1.50			94.50		
70	63	12	1.61			101.43		
71	153	12	1.00			153.00		
72	4	16	5.30					21.20
73	12	16	3.00					36.00
74	32	12	1.60			51.20		
75	40	8	1.09	43.60				
76	20	12	1.62			32.40		
77	16	14	1.60				25.60	
78	16	16	3.50					56.00
79	93	16	12.00					1116.00
80	12	16	4.33					51.96
81	6	16	11.44					68.64
82	1413	12	2.74			3871.62		
83	180	12	1.32			237.60		
84	3774	12	1.45			5472.30		
85	1488	12	2.51			3734.88		
86	688	16	1.65					1135.20
87	12	14	5.00				60.00	
88	8	14	7.00				56.00	
89	20	14	5.50				110.00	
90	4	14	11.00				44.00	
91	8	14	4.00				32.00	
92	8	14	1.50				12.00	
93	8	14	6.20				49.60	
94	4	14	3.00				12.00	
95	24	14	2.50				60.00	
96	6	16	7.36					44.16
97	6	16	2.47					14.82
98	12	16	3.43					41.16
99	72	14	2.22				159.84	
100	12	16	11.96					143.52
101	180	12	2.79			502.20		
102	472	12	3.20			1510.40		
103	2310	12	1.20			2772.00		
104	180	12	1.20			216.00		
105	300	12	1.80			540.00		
106	300	12	2.83			849.00		
107	430	14	1.50				645.00	
108	100	8	0.45	45.00				

Project: . . .

/ .

**B A R S C H E D U L E Steelgrade: S500B**

Pos.	No.	d	Length	D8	D10	D12	D14	D16
109	20	8	0.46	9.20				
110	23	14	2.00				46.00	
Total lengths				97.80	20610.95		2991.36	
kg / m				D8 0.395	D12 0.888		D16 1.580	
kg / d				38.631	18302.524		4726.349	

Total lengths				1305.70	20694.01			
kg / m				D10 0.617	D14 1.210			
kg / d				805.617	25039.753			

Total weight (kg)			48912.874
-------------------	--	--	-----------

**Pos. Comment:**

103	1kom/m2
107	1kom/m2
108	4 kom/m2
109	4 kom/m2

Project: . . .

/ .

**Project data**

Title : .

Component : .

Plan No. : .

**M E S H S C H E D U L E Steelgrade: 500M**

Pos.	No.	Type	Length	Width	Q335	Q524
1	2	Q524	2.50	0.75		3.75
2	2	Q524	2.50	1.70		8.50
3	2	Q524	2.20	1.74		7.66
4	2	Q524	1.00	1.74		3.48
5	2	Q524	1.42	1.42		4.03
7	2	Q335	3.50	1.74	12.18	
8	2	Q524	4.85	0.65		6.30
9	46	Q524	5.48	2.15		541.97
10	52	Q524	4.85	2.15		542.23
11	2	Q524	0.79	1.88		2.97
12	2	Q524	1.30	2.15		5.59
13	4	Q524	1.15	2.15		9.89
14	6	Q524	6.00	0.65		23.40
15	272	Q524	6.00	2.15		3508.80
16	2	Q524	5.48	1.38		15.12
17	2	Q524	4.40	2.15		18.92
18	2	Q524	5.48	0.98		10.74
19	8	Q524	6.00	1.70		81.60
20	4	Q524	6.00	1.27		30.48
21	4	Q524	6.00	1.08		25.92
22	2	Q524	3.90	1.27		9.91
23	54	Q524	3.90	2.15		452.79
24	2	Q524	3.90	1.08		8.42
25	2	Q524	4.68	0.65		6.08
26	52	Q524	4.68	2.15		523.22
27	2	Q524	2.64	2.15		11.35
28	2	Q524	4.68	1.70		15.91
29	2	Q524	0.79	1.08		1.71
30	12	Q524	2.50	2.15		64.50
31	2	Q524	2.50	1.81		9.05
33	8	Q524	1.43	2.08		23.80

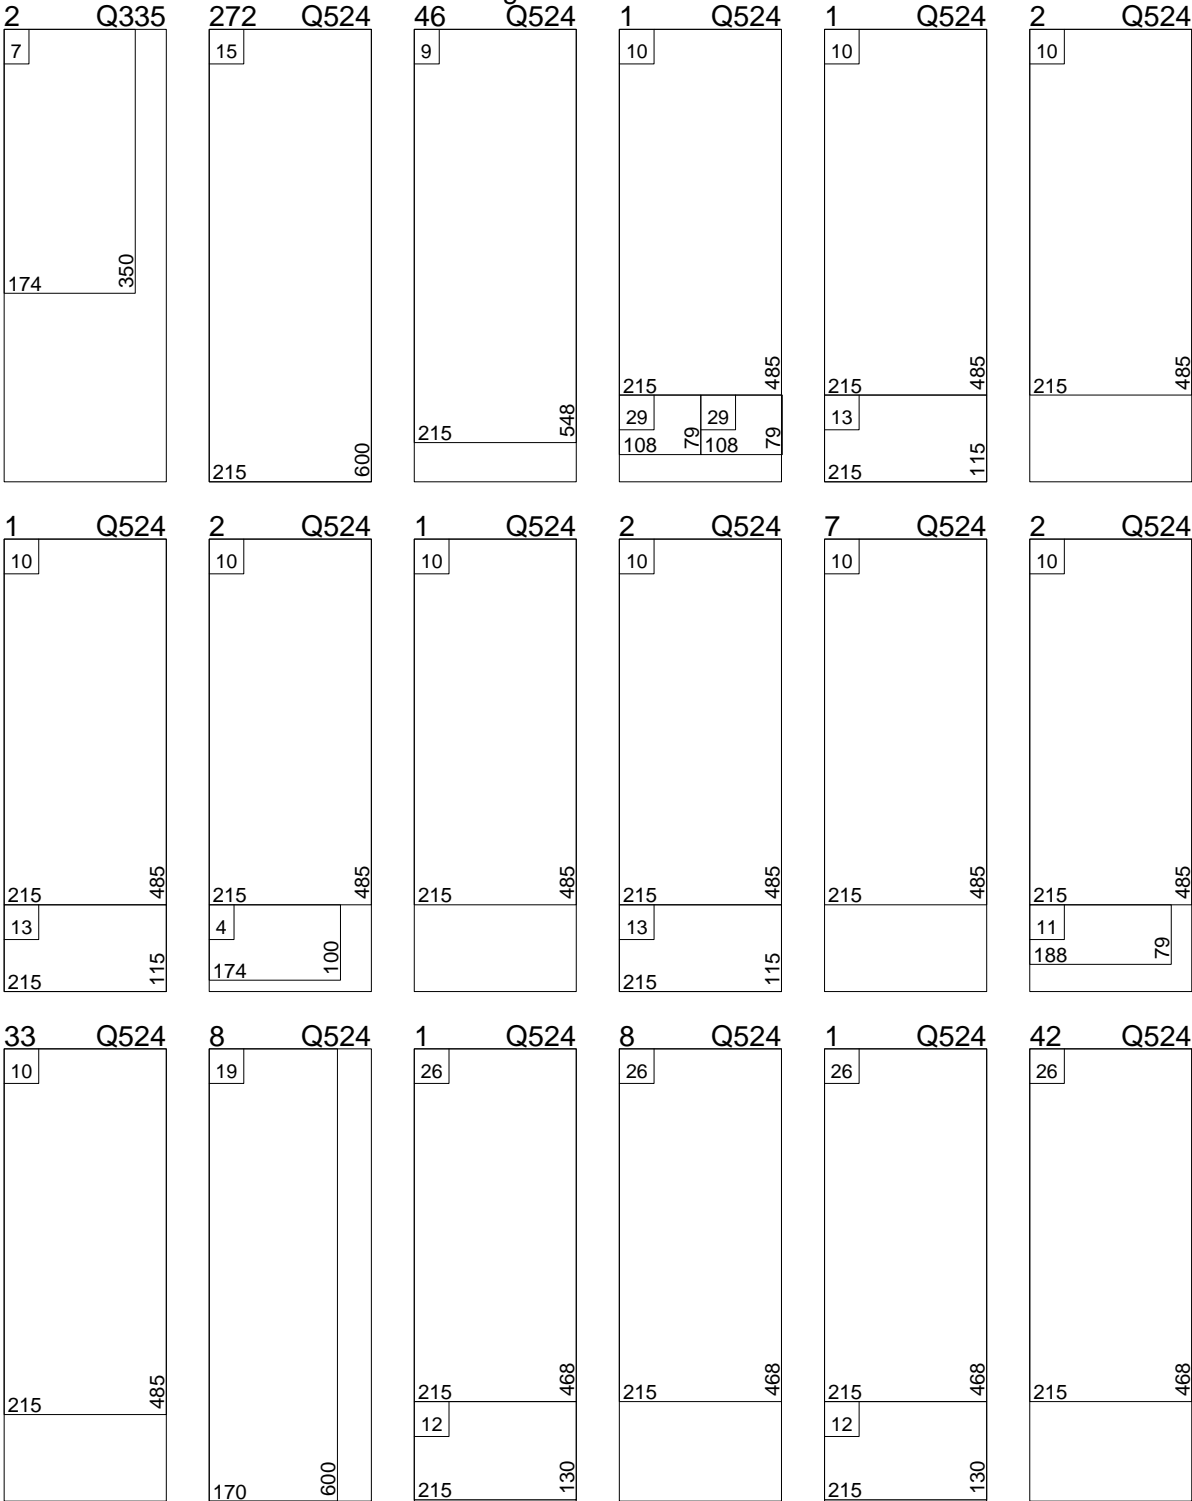
Total area	12.18	5978.11
kg / m2	5.45	8.51
kg / Meshtype	66.381	50873.678

Total weight (kg) 50940.059

Project: . . . / .

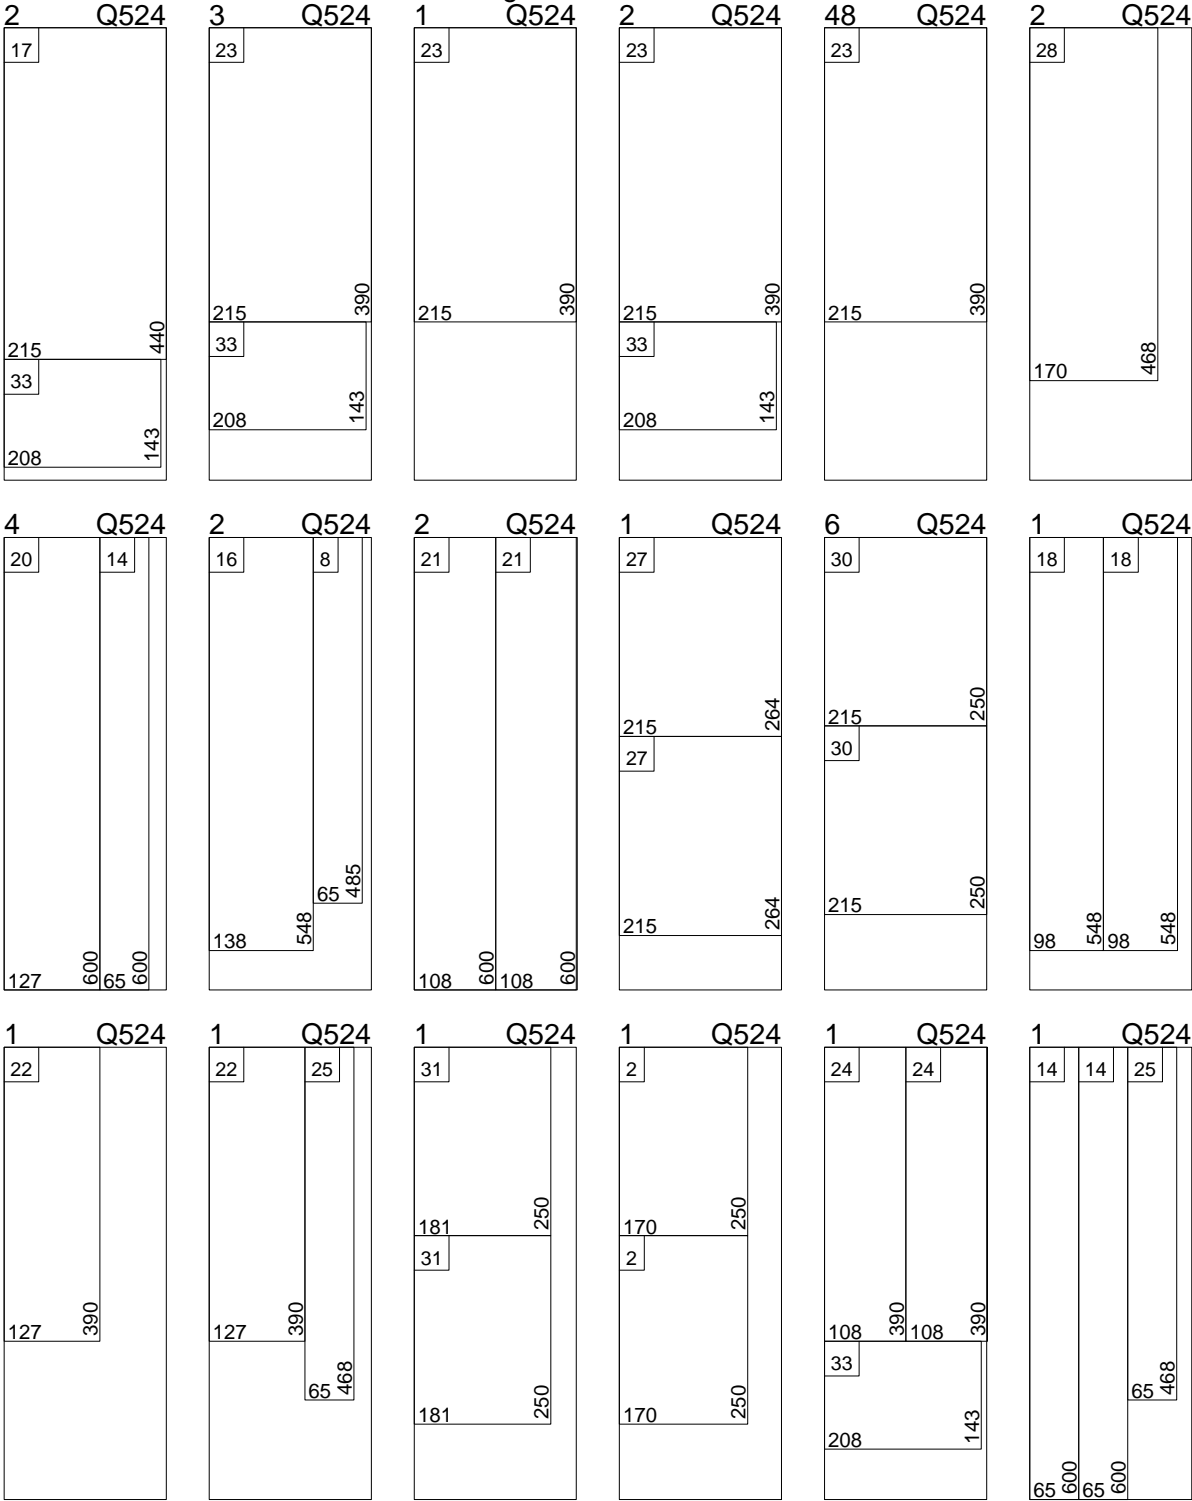
**Project data**  
Title : .  
Component : .  
Plan No. : .

MESH CUTSCHEDULE Steelgrade: 500M



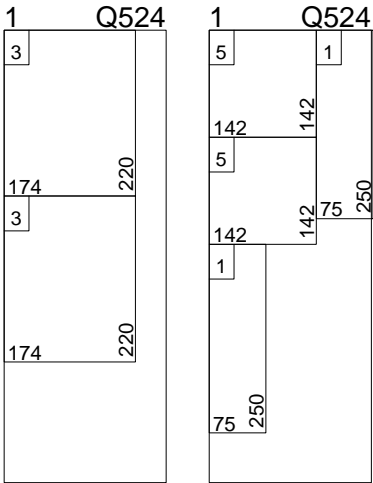
Project: . . . / .

MESH CUT SCHEDULE Steelgrade: 500M



Project: . . . / .

MESH CUT SCHEDULE Steelgrade: 500M














Total steel amount gross

Pcs.	Type	Length m	Width m	Weight kg
2	Q335	6.00	2.15	140.610
512	Q524	6.00	2.15	56206.852
Total weight gross (kg)				56347.462

Project: . . . / .

**Project data**Title : .  
Component : .  
Plan No. : .**BENDING SCHEDULE Steelgrade: S500B**

Pos.	No.	d	Length	dbr ds	Type	shape code	Tot.L	Weight kg
1	327	14	5.63		X1	 Nr. dx dy l >° 1 0.65 0.00 0.59 135 2 -0.39 -0.39 0.49 45 3 -3.47 0.00 3.47 45 4 -0.39 0.39 0.49 135 5 0.65 0.00 0.59 135	1841.01	2227.622
2	327	14	5.65		C3	 20 75 11° 3.75 20 75	1847.55	2235.536
3	414	14	12.00		A1	 12.00	4968.00	6011.280
4	163	14	6.00		A1	 6.00	978.00	1183.380
5	120	14	9.00		A1	 9.00	1080.00	1306.800
6	114	14	2.88		A3	 36 1.26 1.26	328.32	397.267
7	1390	14	1.53		A1	 1.53	2126.70	2573.307
8	29	14	5.44		X1	 Nr. dx dy l >° 1 0.65 0.00 0.59 135 2 -0.39 -0.39 0.49 45 3 -3.28 0.00 3.28 45 4 -0.39 0.39 0.49 135 5 0.65 0.00 0.59 135	157.76	190.890
9	31	14	5.50		C3	 20 75 11° 3.60 20 75	170.50	206.305
10	269	14	6.73		X1	 Nr. dx dy l >° 1 0.65 0.00 0.59 135 2 -0.39 -0.39 0.49 45 3 -4.57 0.00 4.57 45 4 -0.39 0.39 0.49 135 5 0.65 0.00 0.59 135	1810.37	2190.548
11	63	14	5.65		X1	 Nr. dx dy l >° 1 -4.57 0.00 4.57 45 2 -0.39 0.39 0.49 135 3 0.65 0.00 0.59 135	355.95	430.700



Project: . . .

/ .















## BENDING SCHEDULE Steelgrade: S500B

Pos.	No.	d	Length	dbr ds	Type	shape code	Tot.L	Weight kg																																								
12	46	14	6.09		X1	<div><div><div><div><div>-1-</div><div>-2-</div></div><div><div>-3-</div><div>-5-</div></div></div><div><div><div><div></div><div></div><div></div></div></div></div></div><table><tr><td>Nr.</td><td>dx</td><td>dy</td><td>l</td><td>&gt;°</td></tr><tr><td>1</td><td>-0.80</td><td>0.00</td><td>0.80</td><td>6</td></tr><tr><td>2</td><td>-0.20</td><td>0.02</td><td>0.20</td><td>-6</td></tr><tr><td>3</td><td>-4.09</td><td>0.00</td><td>4.09</td><td>45</td></tr><tr><td>4</td><td>-0.35</td><td>0.35</td><td>0.43</td><td>135</td></tr><tr><td>5</td><td>0.63</td><td>0.00</td><td>0.57</td><td></td></tr></table></div>	Nr.	dx	dy	l	>°	1	-0.80	0.00	0.80	6	2	-0.20	0.02	0.20	-6	3	-4.09	0.00	4.09	45	4	-0.35	0.35	0.43	135	5	0.63	0.00	0.57		280.14	338.969										
Nr.	dx	dy	l	>°																																												
1	-0.80	0.00	0.80	6																																												
2	-0.20	0.02	0.20	-6																																												
3	-4.09	0.00	4.09	45																																												
4	-0.35	0.35	0.43	135																																												
5	0.63	0.00	0.57																																													
13	269	14	6.75		C3	<div><div><div><div><div>20</div><div>75</div></div><div><div>20</div><div>4.85</div><div>11°</div><div>20</div><div>75</div></div></div></div></div>	1815.75	2197.058																																								
14	24	14	5.68		C2	<div><div><div><div><div></div><div>11°</div><div>20</div></div><div><div>20</div><div>4.73</div><div>75</div></div></div></div></div>	136.32	164.947																																								
15	51	14	6.18		C2	<div><div><div><div><div></div><div>6°</div><div>20</div></div><div><div>20</div><div>5.18</div><div>80</div></div></div></div></div>	315.18	381.368																																								
16	1	14	4.50		A1	<div><div><div><div></div><div>4.50</div></div></div></div>	4.50	5.445																																								
17	28	16	2.20		A2	<div><div><div><div><div>20</div><div>2.00</div></div></div></div></div>	61.60	97.328																																								
18	18	14	4.91		X1	<div><div><div><div><div><div>-7-</div><div>-5-</div></div><div><div>-6-</div><div>-3-</div></div></div><div><div><div><div></div><div></div><div></div></div></div></div></div><div><div><div><div></div><div></div><div></div></div></div></div><table><tr><td>Nr.</td><td>dx</td><td>dy</td><td>l</td><td>&gt;°</td></tr><tr><td>1</td><td>0.80</td><td>0.00</td><td>0.80</td><td>-6</td></tr><tr><td>2</td><td>0.20</td><td>0.02</td><td>0.20</td><td>6</td></tr><tr><td>3</td><td>1.28</td><td>0.00</td><td>1.28</td><td>-90</td></tr><tr><td>4</td><td>0.00</td><td>0.35</td><td>0.35</td><td>-90</td></tr><tr><td>5</td><td>-1.28</td><td>0.00</td><td>1.28</td><td>6</td></tr><tr><td>6</td><td>-0.20</td><td>0.02</td><td>0.20</td><td>-6</td></tr><tr><td>7</td><td>-0.80</td><td>0.00</td><td>0.80</td><td></td></tr></table></div></div>	Nr.	dx	dy	l	>°	1	0.80	0.00	0.80	-6	2	0.20	0.02	0.20	6	3	1.28	0.00	1.28	-90	4	0.00	0.35	0.35	-90	5	-1.28	0.00	1.28	6	6	-0.20	0.02	0.20	-6	7	-0.80	0.00	0.80		88.38	106.940
Nr.	dx	dy	l	>°																																												
1	0.80	0.00	0.80	-6																																												
2	0.20	0.02	0.20	6																																												
3	1.28	0.00	1.28	-90																																												
4	0.00	0.35	0.35	-90																																												
5	-1.28	0.00	1.28	6																																												
6	-0.20	0.02	0.20	-6																																												
7	-0.80	0.00	0.80																																													
19	69	12	1.95		A3	<div><div><div><div><div>86</div><div>23</div></div><div><div>86</div></div></div></div></div>	134.55	119.480																																								
20	144	10	1.75		A3	<div><div><div><div><div>77</div><div>21</div></div><div><div>77</div></div></div></div></div>	252.00	155.484																																								
21	8	16	3.03		A1	<div><div><div><div></div><div>3.03</div></div></div></div>	24.24	38.299																																								
22	2	14	3.18		A1	<div><div><div><div></div><div>3.18</div></div></div></div>	6.36	7.696																																								
23	36	14	2.39		A3	<div><div><div><div><div>1.08</div><div>23</div></div><div><div>1.08</div></div></div></div></div>	86.04	104.108																																								
24	6	14	3.78		A1	<div><div><div><div></div><div>3.78</div></div></div></div>	22.68	27.443																																								
25	10	12	3.98		A3	<div><div><div><div><div>1.87</div><div>24</div></div><div><div>1.87</div></div></div></div></div>	39.80	35.342																																								
26	34	12	3.46		A3	<div><div><div><div><div>1.61</div><div>24</div></div><div><div>1.61</div></div></div></div></div>	117.64	104.464																																								
27	8	16	2.53		A1	<div><div><div><div></div><div>2.53</div></div></div></div>	20.24	31.979																																								

Project: . . .

/ .

## BENDING SCHEDULE Steelgrade: S500B

Pos.	No.	d	Length	dbr ds	Type	shape code	Tot.L	Weight kg
28	8	16	2.16		X1	 Nr. dx dy l >° 1 0.00 -0.90 0.90 19 2 -0.09 -0.27 0.28 -19 3 0.00 -0.78 0.78 -90 4 0.20 0.00 0.20	17.28	27.302
29	10	16	2.15		X1	 Nr. dx dy l >° 1 0.00 -0.90 0.90 9 2 -0.04 -0.27 0.27 -9 3 0.00 -0.78 0.78 -90 4 0.20 0.00 0.20	21.50	33.970
30	6	16	2.16		X1	 Nr. dx dy l >° 1 0.00 -0.90 0.90 15 2 -0.07 -0.27 0.28 -15 3 0.00 -0.78 0.78 -90 4 0.20 0.00 0.20	12.96	20.477
31	9	14	3.89		X1	 Nr. dx dy l >° 1 0.00 -0.80 0.80 19 2 -0.09 -0.27 0.28 -19 3 0.00 -0.77 0.77 -90 4 0.20 0.00 0.20 -90 5 0.00 1.84 1.84	35.01	42.362
32	12	14	3.90		A3		46.80	56.628
33	12	14	3.89		X1	 Nr. dx dy l >° 1 0.00 -0.80 0.80 15 2 -0.07 -0.27 0.28 -15 3 0.00 -0.77 0.77 -90 4 0.20 0.00 0.20 -90 5 0.00 1.84 1.84	46.68	56.483
34	8	14	2.88		B1	 Hooklength=21.0	23.04	27.878
35	4	14	9.92		A1		39.68	48.013
36	4	16	9.80		A1		39.20	61.936
37	2	16	3.59		A1		7.18	11.344
38	2	16	5.25		A1		10.50	16.590
39	8	16	6.00		A1		48.00	75.840
40	39	14	5.68		C2		221.52	268.039
42	8	14	7.90		C3		63.20	76.472

Project: . . .

/ .























## BENDING SCHEDULE Steelgrade: S500B

Pos.	No.	d	Length	db ds	Type	shape code	Tot.L	Weight kg
43	8	14	7.84		X1	 Nr. dx dy l >° 1 0.65 0.00 0.59 135 2 -0.39 -0.39 0.49 45 3 -5.68 0.00 5.68 45 4 -0.39 0.39 0.49 135 5 0.65 0.00 0.59 135	62.72	75.891
44	21	14	2.51		A3		52.71	63.779
45	21	14	4.19		X1	 Nr. dx dy l >° 1 -3.11 0.00 3.11 45 2 -0.39 0.39 0.49 135 3 0.65 0.00 0.59 135	87.99	106.468
46	21	14	4.22		C2		88.62	107.230
47	1	14	4.17		A1		4.17	5.046
48	16	12	2.63		A2		42.08	37.367
49	16	14	2.28		A1		36.48	44.141
50	8	14	1.54		A1		12.32	14.907
51	8	14	2.74		A1		21.92	26.523
52	12	14	1.68		A2		20.16	24.394
53	4	14	1.28		A2		5.12	6.195
54	34	10	3.16		A3		107.44	66.290
55	29	10	2.10		A3		60.90	37.575
56	32	12	2.23		A2		71.36	63.368
57	152	10	1.97		A3		299.44	184.754
58	28	10	3.50		A1		98.00	60.466
59	8	10	2.77		A3		22.16	13.673
60	64	10	1.90		A3		121.60	75.027

Project: . . .

/ .



















**BENDING SCHEDULE Steelgrade: S500B**

Pos.	No.	d	Length	dbr ds	Type	shape code	Tot.L	Weight kg
61	46	10	3.09		A3		142.14	87.700
62	4	14	2.53		A2		10.12	12.245
63	4	14	2.13		A2		8.52	10.309
64	16	14	1.93		A1		30.88	37.365
65	16	14	2.80		A2		44.80	54.208
66	88	10	1.92		A3		168.96	104.248
67	29	12	2.31		A4		66.99	59.487
68	29	10	1.14		A2		33.06	20.398
69	63	12	1.50		A1		94.50	83.916
70	63	12	1.61		A3		101.43	90.070
71	153	12	1.00		A1		153.00	135.864
72	4	16	5.30		A1		21.20	33.496
73	12	16	3.00		A1		36.00	56.880
74	32	12	1.60		A1		51.20	45.466
75	40	8	1.09		A3		43.60	17.222
76	20	12	1.62		A3		32.40	28.771
77	16	14	1.60		A1		25.60	30.976
78	16	16	3.50		A1		56.00	88.480
79	93	16	12.00		A1		1116.00	1763.280
80	12	16	4.33		A1		51.96	82.097
81	6	16	11.44		A1		68.64	108.451
82	1413	12	2.74		A3		3871.62	3437.999

Project: . . .

/ .

**BENDING SCHEDULE Steelgrade: S500B**

Pos.	No.	d	Length	dbr ds	Type	shape code	Tot.L	Weight kg
83	180	12	1.32		A2		237.60	210.989
84	3774	12	1.45		A2		5472.30	4859.402
85	1488	12	2.51		A3		3734.88	3316.573
86	688	16	1.65		A2		1135.20	1793.616
87	12	14	5.00		A1		60.00	72.600
88	8	14	7.00		A1		56.00	67.760
89	20	14	5.50		A1		110.00	133.100
90	4	14	11.00		A1		44.00	53.240
91	8	14	4.00		A1		32.00	38.720
92	8	14	1.50		A1		12.00	14.520
93	8	14	6.20		A1		49.60	60.016
94	4	14	3.00		A1		12.00	14.520
95	24	14	2.50		A1		60.00	72.600
96	6	16	7.36		A1		44.16	69.773
97	6	16	2.47		A1		14.82	23.416
98	12	16	3.43		A1		41.16	65.033
99	72	14	2.22		A3		159.84	193.406
100	12	16	11.96		A1		143.52	226.762

Project: . . .

/ .

**BENDING SCHEDULE Steelgrade: S500B**

Pos.	No.	d	Length	dbr ds	Type	shape code	Tot.L	Weight kg
101	180	12	2.79		X1	<p>Nr. dx dy l &gt;°  1 0.28 0.00 0.24 128  2 -0.49 -0.64 0.77 52  3 -0.77 0.00 0.77 52  4 -0.49 0.64 0.77 128  5 0.28 0.00 0.24</p>	502.20	445.954
102	472	12	3.20		A2		1510.40	1341.235
103	2310	12	1.20		D2	<p>Comment: 1kom/m2</p>	2772.00	2461.536
104	180	12	1.20		A1		216.00	191.808
105	300	12	1.80		A1		540.00	479.520
106	300	12	2.83		A1		849.00	753.912
107	430	14	1.50		D2	<p>Comment: 1kom/m2</p>	645.00	780.450
108	100	8	0.45		D1	<p>Comment: 4 kom/m2</p>	45.00	17.775
109	20	8	0.46		D1	<p>Comment: 4 kom/m2</p>	9.20	3.634

Project: . . . / .

B E N D I N G   S C H E D U L E   Steelgrade: S500B								
Pos.	No.	d	Length	dbr ds	Type	shape code	Tot.L	Weight kg
110	23	14	2.00		A1	<div><div></div><div>2.00</div></div>	46.00	55.660

Total weight (kg) 48912.874