

Glavno stopnišče, priličje - 1. nadstropje, trakt D -tloris

The diagram is a detailed architectural floor plan of a staircase, labeled 'N2C_02 stopnice' (N2C_02 steps). The staircase is rectangular, measuring 145 units in width and 123 units in depth. The steps are numbered 27 through 52, arranged in a grid. The plan includes various dimensions and material specifications:

- Dimensions:**
 - Overall width: 145
 - Overall depth: 123
 - Step width: 27
 - Step depth: 40
 - Step height: 4.7
 - Step width (inner): 38, 37, 36, 35, 34, 33, 32, 31, 30, 29, 28, 27
 - Step depth (inner): 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52
- Material Specifications:**
 - Step material: 'gres ploščice' (ceramic tiles), 26x15,23x35 cm
 - Handrail material: 'okvir ograje z držalom' (handrail frame with handle)
- Other Features:**
 - A red octagonal symbol labeled 'OG4' is located near the bottom left corner.
 - A red arrow labeled 'POGLEJ 2' (LOOK 2) points towards the top right corner.
 - A red arrow labeled 'N2C_01 hodnik' (N2C_01 corridor) points towards the top right corner.
 - A red arrow labeled 'T6b' points towards the top right corner.
 - A red arrow labeled '+5.79' points towards the top right corner.
 - A red arrow labeled '+7.72' points towards the top right corner.

[illegible]

Technical drawing of a rectangular wooden frame (Rozměry v mm).

Dimensions:


- Overall width: 123
- Overall height: 120
- Inner height: 105
- Bottom rail thickness: 10
- Vertical slat spacing: 10, 10, 10

Material specifications:

- *rotací ohráň*: ovální kvadratické profily z lesa, 50/50 mm, strana v okvě ohráň RAL 9010
- *okvě ohráň*: palina plochévina 15/50 mm RAL 9010

Color: POŘED 2

Fotografija prikazuje obstoječe stopnišče z ograjo in lesenim rokooprijemom.
Obstoječa stopniščna ograja se popravi, prav tako obstoječ lesen rokooprijem

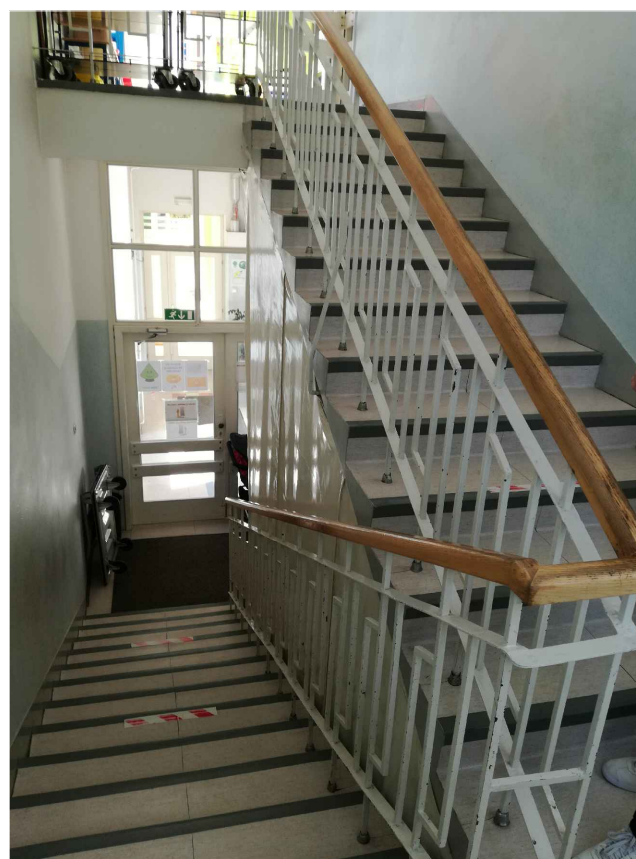

OPOMBA : Pred izvedbo je potrebno vse mere preveriti na gradbišču, izveba po potrjenem detajlu!

Lokacija:	pritličje – 2. nadstopje
Barva:	RAL 9010, bela
Število kosov:	1 kom.

OGRAJA Z ROČAJEM:

- ročaj kvadratni profil 50/50 mm iz lesa, sidran v okvir pograje
- okvir ograje je iz polne pločevine, dim 15/50mm
- ograja je talno pritrjena na stopniščne rame preko pritrilnih ploščic
- tovarniško barvano, RAL 9010